

# दीवार दुरुस्त, घर तंदरुस्त




## About Us

**Wonder WallCare Pvt. Ltd.** a **RK Group** company manufactures White-Cement based putty, The Wonder Wall Putty. Enriched with the heritage of **RK Marble**, a leading name in the marble industry, our core is built on the values of quality, trust and transparency.

Wonder WallCare is committed to provide high quality product through its fully automated manufacturing plant situated at Morwad, Rajsamand - Rajasthan, established in technical collaboration with FLSmidth, Denmark and KHD Humboldt Wedag, Germany. Backed by one of the world's largest manufacturing facility housing state-of-the-art machinery, enabling us to produce the best-in-class wall putty at all times.

Our Product "**Wonder Wall Putty**" is made from highest quality raw material obtained from the world class mines situated in Morwad Rajasthan, special polymers and white cement. With its unmatched quality "**Wonder Wall Putty**" ensures "**Ek Perfect Finish**" to the walls by providing smooth, white, and protective base coat for paints on Internal and External Surfaces.

## Why Wonder Wall Putty ?

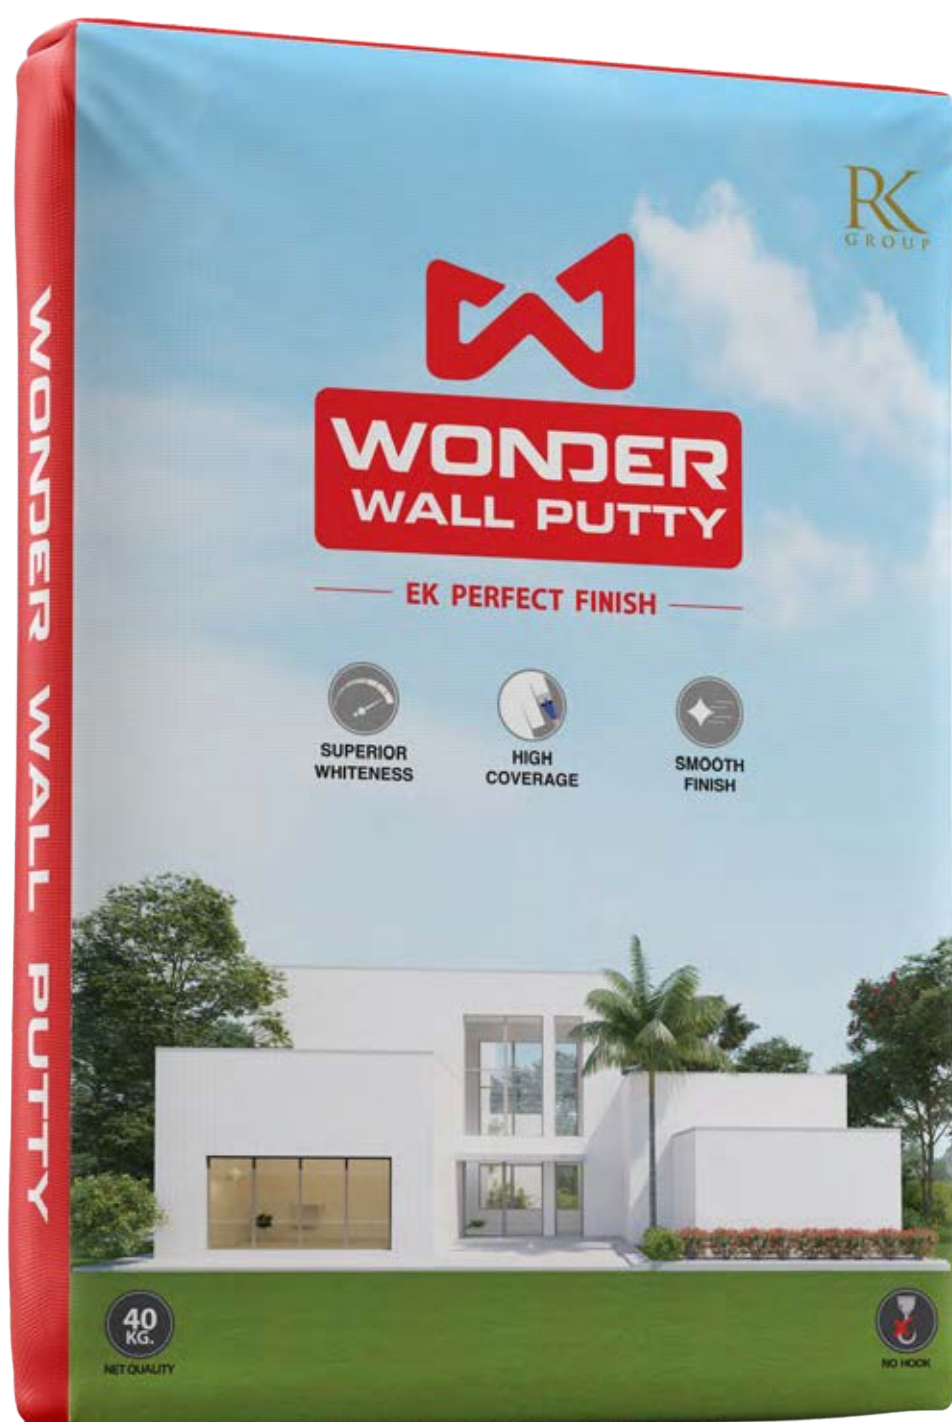

**SUPERIOR  
WHITENESS**

Helps In Getting  
True Shade of Paint



Saving In  
Putty Consumption

**HIGH  
COVERAGE**



**SMOOTH  
FINISH**

Provides Elegant  
Look to The Wall

## How to Apply

01



Clean the wall using emery paper/ putty blade/wire brush to remove loose particles, dust, lubricants etc.

02



Pre-wetting of the wall is required for proper adhesion of putty over the surface and to achieve better quality results.

03



Prepare the putty paste by adding 35%-40% clean water to Wonder Wall Putty (350-400 ml in 1kg of putty)

04




Mix the putty and water thoroughly with putty mixing machine. Leave it for 5-10 minutes and re-stir for getting homogenous paste.

05



Apply the first coat of Wall Putty with the help of putty blade and let it dry for at least 3-4 hours or as required. (Drying time depends on weather and ambient temperature)  
Second coat should be applied only after the first coat is completely dried.

06

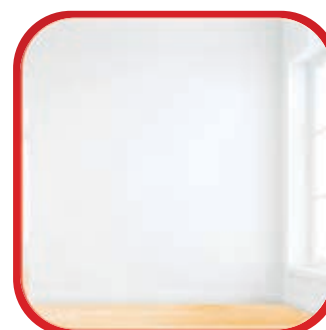

Scrub the wall with emery paper of 500+ no. to remove the marks of putty blade (if required)

**Desired smooth wall is ready for paint application.**

## What Makes Wonder Wall Putty Best Choice for Your Walls

### High Quality Raw Material



- Superior whiteness
- Provides true tone of paint
- Consistency in quality

### Special Polymers



- Curing free
- Stronger adhesion
- Water resistance

### White Cement



- Stronger bonding with walls
- More durability
- Ideal for internal and external surfaces

## Recommended Areas of Application


### INTERNAL WALLS



Bedroom



Hall Area

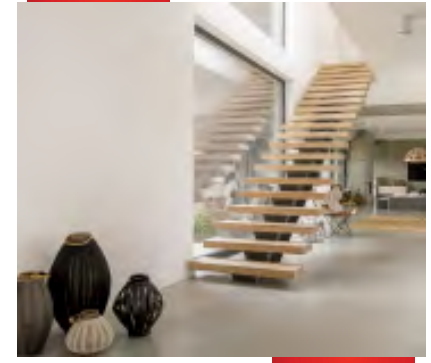

Lobby

### EXTERNAL WALLS



Malls



Office Building



Residential Apartment

### SPECIAL AREA



Industrial Building



Parking Lot



Lift Shaft

## Technical Specifications

Properties	Units	Specification	Test Results	Test Methods
<b>Tensile Adhesion Strength</b>				
14 Days	N/mm <sup>2</sup>	≥ 1.0	1.1	EN 1348
<b>Setting Time</b>				
Initial	Minutes	≥ 180	280	EN 196
Final	Minutes	≤ 500	310	EN 196
<b>Compressive Strength</b>				
28 Days	N/mm <sup>2</sup>	≥ 5.0	5.2	EN 1015-11
<b>Water Capillary Absorption, 30 minutes</b>				
14 Days	ml	≤ 0.4	0.2	Karsten Tube
Water Retentivity	%	≥ 98	99	DIN 18555-7

## WONDER WALLCARE PVT. LTD

**PLANT:**  
Village & Post - Morwad, Distt. -  
Rajsamand, Rajasthan - 313324  
CIN: U24200RJ2019PTC067368

**REGISTERED OFFICE:**  
C/O RK Marble Private Limited,  
Makrana Road, Madanganj, Kishangarh, Ajmer,  
Rajasthan - 305801 | Ph. +91 1463 277777

**HEAD OFFICE:**  
411-413, 4th Floor, Gaurav Tower-II,  
Malviya Nagar Jaipur  
Rajasthan 302017